

## HMI with 15.6" FHD IPS Display



### Feature

- The oTP integrated touch solution offers an edge-to-edge design, high-resolution and high-transmittance.
- 15.6" 1920 x 1080 FHD IPS LCD
- Supports Vibration Alerting
- Quad-core Cortex-A17 CPU with High Performance dedicated 3D Processor
- Fan-less Cooling System
- Built-in 4GB Flash Memory and RTC
- COM1 / COM3 RS-485 2W Supports MPI 187.5K, please use one at a time.
- Built-in Power Isolator
- NEMA4/IP66 Compliant Front Panel


<b>Display</b>	Display	15.6" IPS
	Resolution	1920 x 1080
	Brightness (cd/m <sup>2</sup> )	300
	Contrast Ratio	800:1
	Backlight Type	LED
	Backlight Life Time	>30,000 hrs.
	Colors	16.2M
	LCD Viewing Angle (T/B/R/L)	89/89/89/89
	Pixel Pitch (mm)	0.17925(H) x 0.17925(V)
<b>Touch Panel</b>	Type	Tempered Glass, Capacitive Type
	Hardness Scale	7H
<b>Memory</b>	Flash	4 GB
	RAM	1 GB
<b>Processor</b>		Quad-core RISC
<b>I/O Port</b>	SD Card Slot	N/A
	USB Host	USB 2.0 x 1
	USB Client	N/A
	Ethernet	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1
	COM Port	Con.A: COM1 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	RS-485 Isolation	N/A
	CAN Bus	Yes
	HDMI	N/A
<b>RTC</b>	Audio Output	Built-in Mono Speaker
<b>Power</b>	Input Power	Built-in
	Power Isolation	24±20%VDC
	Power Consumption	Built-in
	Voltage Resistance	1.3A@24VDC
	Isolation Resistance	500VAC (1 min.) Exceed 50MΩ @ 500VDC
<b>Specification</b>	PCB Coating	Yes
	Enclosure	Front bezel: Plastic, Rear Enclosure: Aluminum
	Dimensions WxHxD	400 x 263 x 27.6 mm
	Panel Cutout	384 x 247 mm
	Weight	Approx. 1.6 kg
	Mount	Panel mount, VESA mount 100 x 100 mm
<b>Environment</b>	Protection Structure	NEMA4 / IP66 Compliant Front Panel
	Storage Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 50°C (32° ~ 122°F)
	Relative Humidity	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
<b>Certificate</b>	CE	CE marked
	UL	cULus Listed
<b>Software</b>	EasyBuilder Pro	V6.04.01 or later versions
	Weincloud	EasyAccess 2.0 (Optional), Dashboard* (Optional)
	CODESYS®	Optional

\* Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.

\* Dashboard requires EasyBuilder Pro V6.06.01 or later versions.

\* CODESYS® is a trademark of 3S-Smart Software Solutions GmbH.

## Dimensions

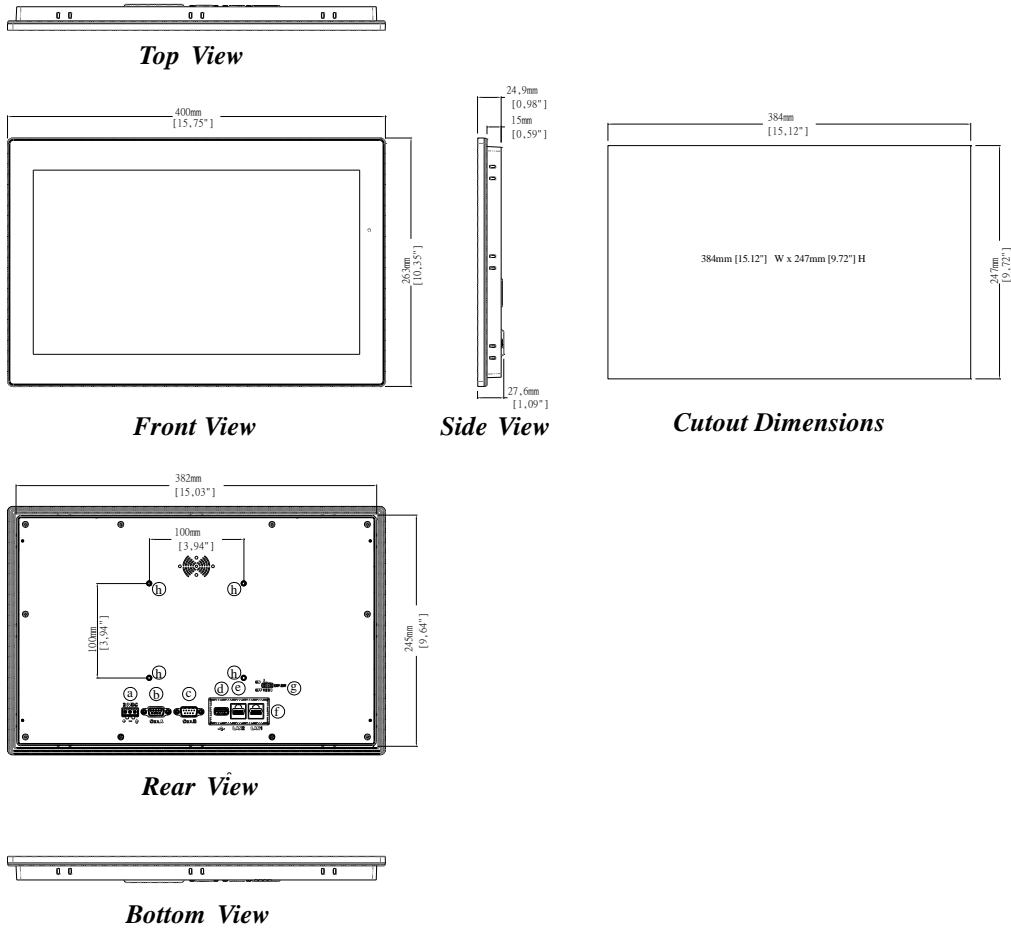

<b>a</b>	Power Connector	<b>e</b>	LAN2
<b>b</b>	COM1 RS-485, COM3 RS-485, CAN Bus (Con.A)	<b>f</b>	LAN1
<b>c</b>	COM1 RS-232, COM3 RS-232 (Con.B)	<b>g</b>	DIP SW
<b>d</b>	USB Host	<b>h</b>	VESA 100mm Screw Holes

## Ordering Information

**cMT3162X:**

15.6" IPS LCD HMI, 4GB flash memory, 1GB RAM on board

Optional:

- RZ0CDS000:** CODESYS activation card & license sticker
- RZACEA020:** EasyAccess 2.0 Activation Card

**Pin Assignment:**

**Con. B: COM1 / COM3 [RS232] 9 Pin, Male, D-sub**

PIN#	COM1 [RS232]4W	COM3 [RS232]2W
1		
2	RxD	
3	TxD	
4		
5	GND	
6		
7	RTS	TxD
8	CTS	RxD
9	GND	

**Con. A: COM1 / COM3 [RS485]/ CAN Bus 9 Pin, Female, D-sub**

PIN#	COM1 [RS485]2W	COM1 [RS485]4W	COM3 [RS485]2W	CAN Bus
1	Data-	Rx-		
2	Data+	Rx+		
3		Tx-		
4		Tx+		
5	GND			
6			Data-	
7				CAN_L
8				CAN_H
9			Data+	